



## No-Caulk Shower Drain Compression Gasket - Brass Body

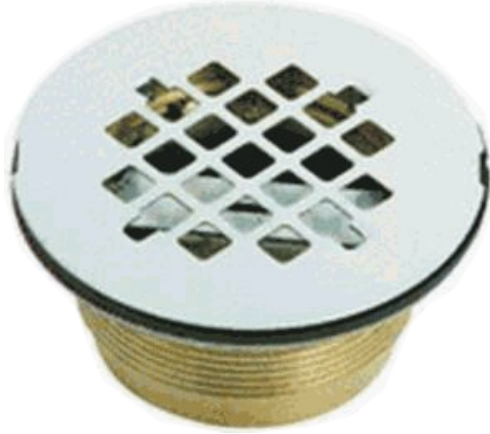

- Drain body installs from top side of shower while outer locknut threads onto body from underneath using friction rings, etc.
- Compression gasket (provided) tightens around 2" schedule 40 pipe with inner nut and wrench.
- Wrench (included) goes over 2" pipe for easy installation.
- Solid brass body: Extremely rugged.
- Internal compression gasket can be temporarily removed to allow the shower to be slipped over the roughed-in pipe.

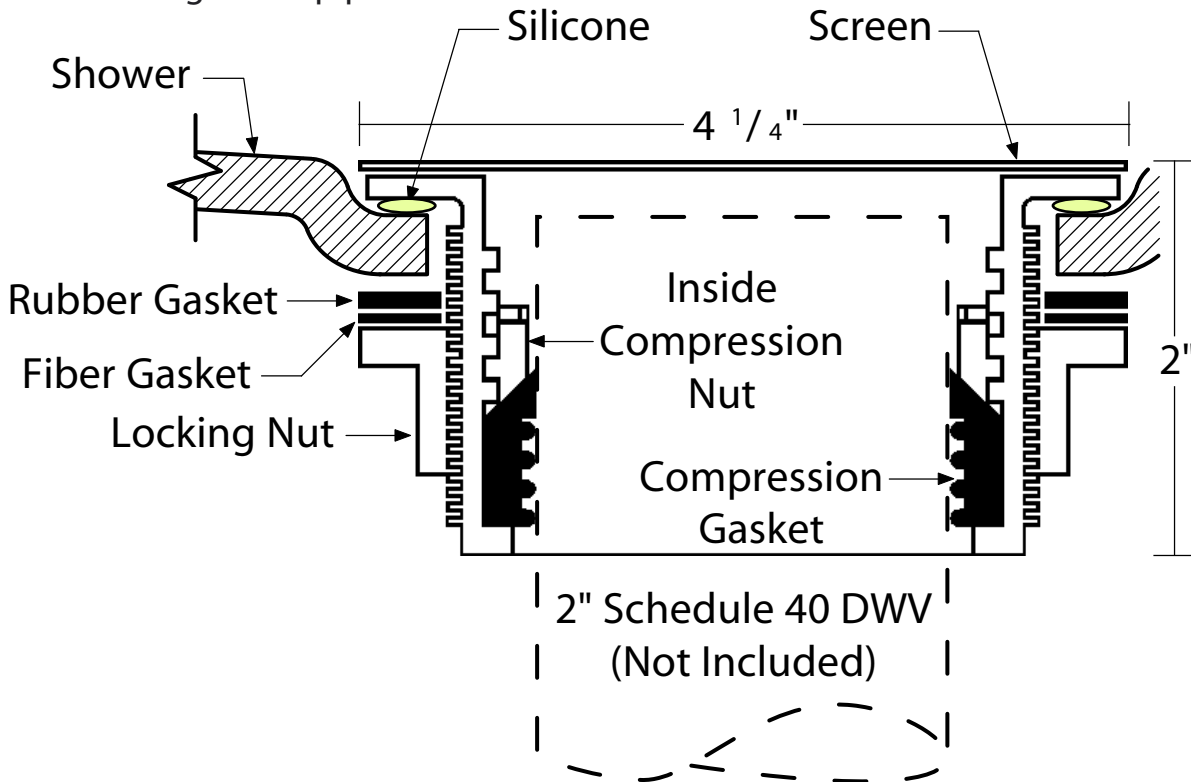

CHECK ONE

PART NUMBER	Description
ACXDRAIN1000	Brass No-Caulk Shower Drain w/Stainless Steel Screen
KACXDRAIN2000	Brass No-Caulk Shower Drain and Caulking Gasket to fit 2" No-hub Cast Iron Pipe
KACXDRAIN2001	Brass No-Caulk Shower Drain and Caulking Gasket to fit 2" Copper DWV Drain Pipe
KACXDRAIN2004	Brass No-Caulk Shower Drain and Mechanical Attaching Screen for Tamper Resistance

